User Manual

PageScope Light for CF2001P

www.minoltaeurope.com The essentials of imaging

MINOLTA

PAGESCOPE Light

Table of Contents

1 Welcome 1-1

Trademark Acknowledgements 1-1

2 System Requirements 2-1

3 Access 3-1

3.1 Operation 3-1

4 Screen Configuration 4-1

5 System Tab 5-1

5.1 Summary 5-1

5.2 Details 5-2

Input Tray 5-2
Output Tray 5-3
Hard Disk Status 5-4
ROM Version 5-5
Interface Information 5-6
Consumable Status 5-7

5.3 Preference 5-9

5.4 Online Assistance 5-10

6 Printer Tab 6-1

6.1 Printer Front Panel 6-1

6.2 Test Print 6-2

6.3 PostScript Font 6-3

7 Appendix Status List 7-1

1 Welcome

PageScope Light for CF2001P is a device control utility program provided by the HTTP server built into the CF2001P. With a standard Web browser, this utility can be used as an interface for remote control of the CF2001P.

Trademark Acknowledgements

Minolta is a registered trademark of MINOLTA CO., LTD. PageScope is a trademark of MINOLTA CO., LTD.

Apple and Macintosh are registered trademarks of Apple Computer, Inc.

Ethernet is a registered trademark of Xerox Corporation.

Fiery and the Fiery logo are registered trademarks of Electronics for Imaging, Inc. Fiery WebTools is a trademark of Electronics for Imaging, Inc.

Linux is a registered trademark of Linus Torvalds.

Microsoft, Windows, and Windows NT are registered trademarks of Microsoft Corporation.

Netscape Communications, the Netscape Communications logo, Netscape Navigator, Netscape Communicator, and Netscape are trademarks of Netscape Communications Corporation.

PostScript is a registered trademark of Adobe Systems, Inc.

Solaris is a trademark of Sun Microsystems, Inc.

All other product names are trademarks or registered trademarks of their respective holders.

Copyright 2001 MINOLTA CO., LTD.

The information contained in this manual is subject to change without notice to incorporate improvement made on the product or products the manual covers.

2 System Requirements

The following items are required to use this utility.

- Computer
  - Software

Operating System	Web Browser
Windows 95/98/Me/NT 4.0/2000	Internet Explorer 4 or higher Netscape Navigator 4 or higher
Macintosh System 7 or higher	Internet Explorer 4.5 or higher Netscape Navigator 4 or higher
Solaris 2.5.1/2.6/7 (2.7)	Netscape Navigator 4 or higher
Linux	Netscape Navigator 4 or higher

  - NIC (Network Interface Card)
  - Ethernet or Token Ring
  - TCP/IP Protocol
- CF2001P

3 Access

PageScope Light for CF2001P can be accessed directly from a Web browser.

1 Start the Web browser.

2 In the URL field, enter the IP address of the printer controller as shown below.

http://<IP address of printer>/

(Example) When the IP address of the printer is 192.9.200.200:

http://192.9.200.200/

3 This causes PageScope Light for CF2001P screen to appear.

3.1 Operation

PageScope Light for CF2001P operation is identical to that for Internet Web pages. Clicking a hot link jumps to the link destination, and the [Back] and [Forward] buttons scroll through pages backwards and forward.

4 Screen Configuration

The configuration of the PageScope Light for CF2001P screen is shown below.

NOTE

➔ Screen images shown in this manual may differ slightly from actual ones. Also note that specifications are subject to change without prior notice.

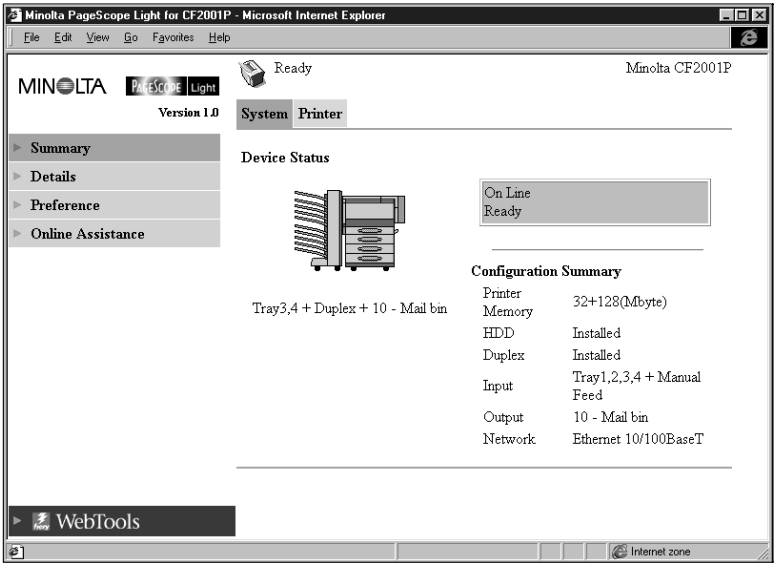

1. Minolta PageScope Light Logo

   Clicking the logo jumps to the Website below.

   www.minolta.com

2. Status Display

   The current status of the CF2001P is indicated by both icons and text. The message *READY* appears when the CF2001P is operating normally. For full details about screen contents, see page 7-1.

3. Tabs

   Use the tabs to select the category of items you want to display. See the following sections of this document for detailed information about each tab.

4. Menus

   Use the menus to select information or setting items. The menus that appear depend on the currently selected tab.
   See the following sections of this document for detailed information about each menu.

5. Information and Settings Display

   This display shows information or settings in accordance with the selected menu item.

6. Fiery Web Tools Logo

   Clicking this logo displays the settings page for Fiery Web Tools, which is built in to the printer controller.
   For details about Fiery WebTools, see the Fiery X3e User Manual.

5 System Tab

The [System] tab shows information about and settings for the CF2001P system configuration.

5.1 Summary

This screen is the initial screen when you access http://<IP address of printer> with your Web browser. You can also display it by clicking the [Summary] menu on the [System] tab. It shows the current CF2001P system configuration.

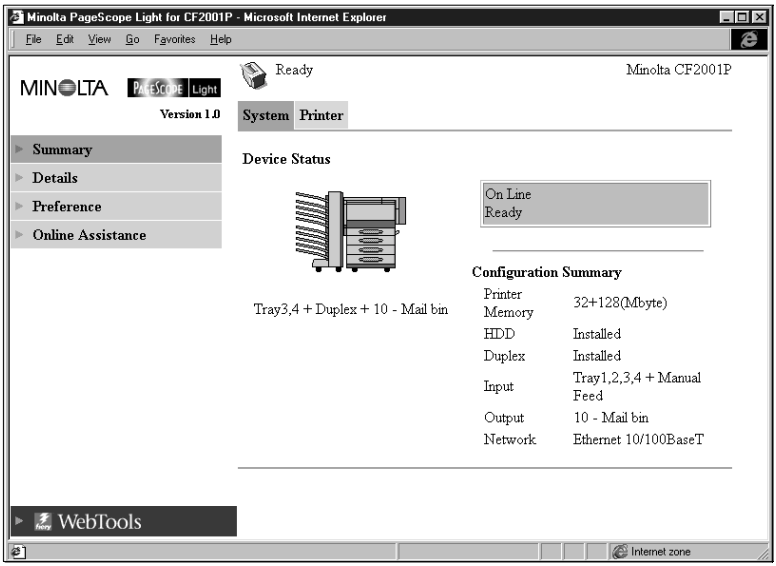

- Device Status
  This area uses graphics and text to show the configuration of options installed on the CF2001P.
- Operational Panel Display
  This area shows the CF2001P message display. Messages are the same as the Status Display messages that appear in the upper part of the window.
- Configuration Summary
  This area shows an overview of the current CF2001P system configuration.

5.2 Details

This screen appears when you click the “Details” menu on the [System] tab. It shows details about each of the CF2001P´s units. Clicking a sub-menu under the “Details” menu displays information about the applicable unit.

Input Tray

This screen appears when you click the [Input Tray] sub-menu under the “Details” menu. It shows the configuration of all the Input Trays installed on the CF2001P.

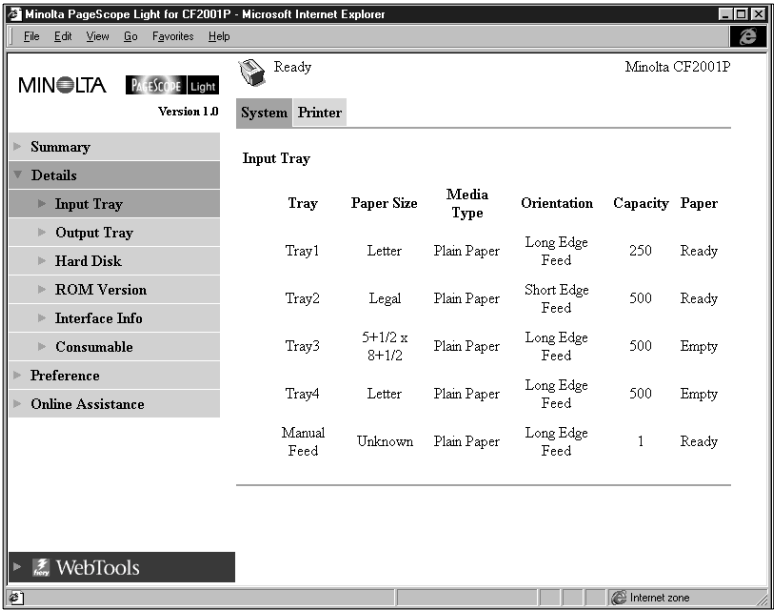

Input Tray

Tray	Paper Size	Media Type	Orientation	Capacity	Paper
Tray1	Letter	Plain Paper	Long Edge Feed	250	Ready
Tray2	Legal	Plain Paper	Short Edge Feed	500	Ready
Tray3	5+1/2 x 8+1/2	Plain Paper	Long Edge Feed	500	Empty
Tray4	Letter	Plain Paper	Long Edge Feed	500	Empty
Manual Feed	Unknown	Plain Paper	Long Edge Feed	1	Ready

- Tray
  Tray name
- Paper Size
  Size of paper loaded in the tray
- Media Type
  Type of media loaded in the tray
- Orientation
  Orientation of paper loaded in the tray
- Capacity
  Maximum number of sheets that can be loaded in the tray

- Paper
  Remaining paper status (Shows *READY* when paper is present, and *EMPTY* when there is no paper left.)

Output Tray

This screen appears when you click the [Output Tray] sub-menu under the “Details” menu. It shows the configuration of all the Output Trays installed on the CF2001P.

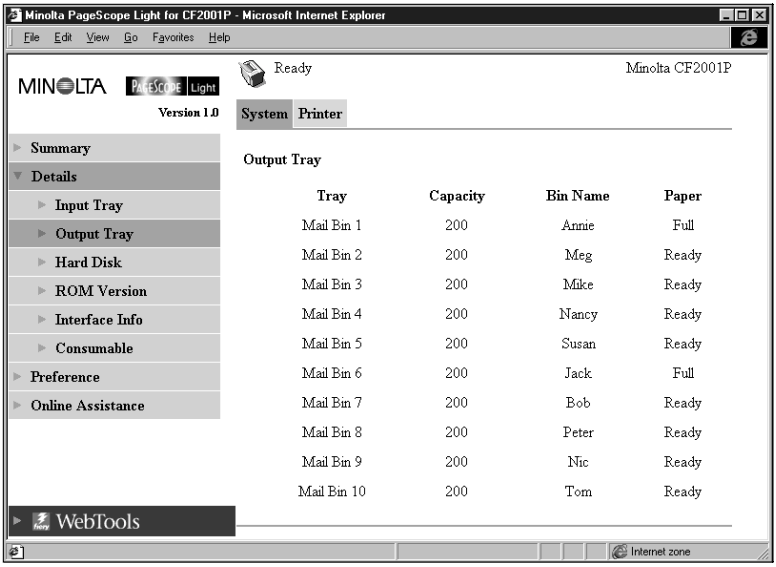

- Tray
  Tray name
- Capacity
  Maximum number of sheets the tray can hold
- Bin Name
  When the mail bin finisher is installed, owner name assigned to each bin.
- Paper
  Tray status (Shows *FULL* when the tray is unable to receive any more paper, and *READY* when it is.)

Hard Disk Status

This screen appears when you click the [Hard Disk] sub-menu under the “Details” menu. It shows the status of the hard disk installed on the CF2001P.

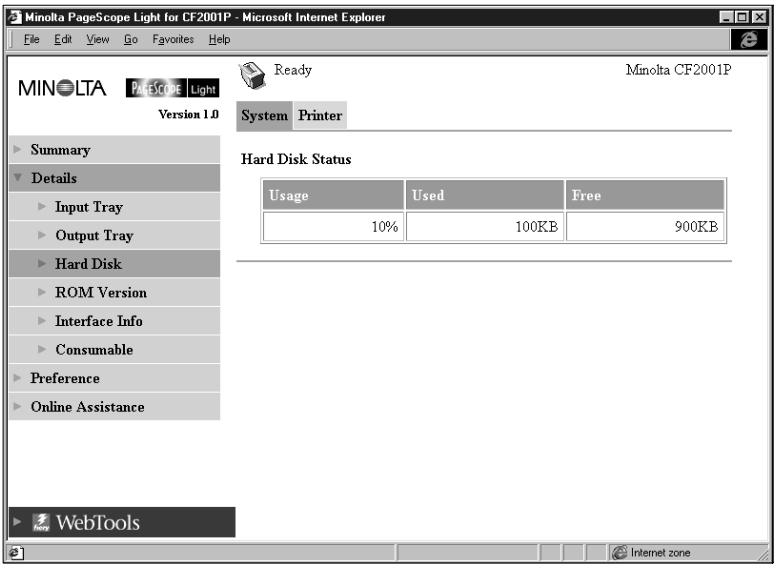

- Usage
  Percent of hard disk space used (%)
- Used
  Amount of hard disk space used (KB)
- Free
  Amount of hard disk space free (KB)

ROM Version

This screen appears when you click the [ROM Version] sub-menu under the “Details” menu. It shows information about the on-board memory of the CF2001P.

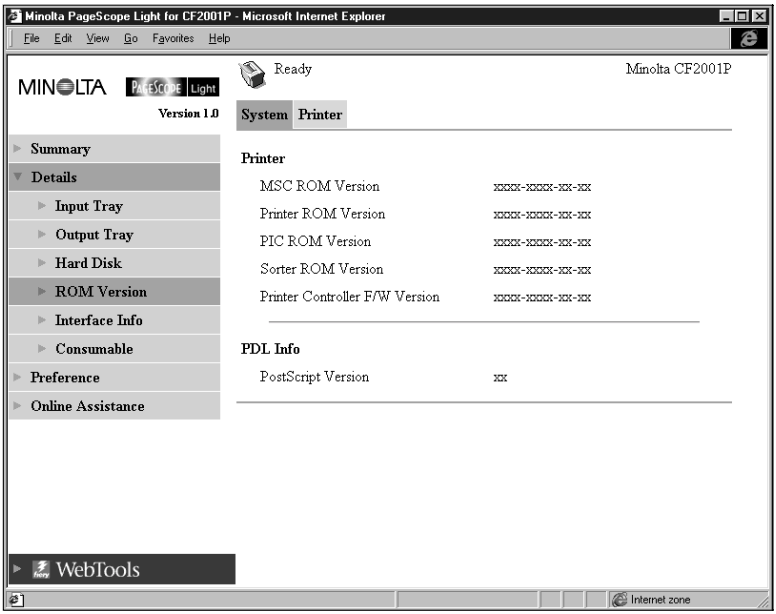

- Printer
  Version of ROM and firmware installed on the CF2001P
- PDL Info
  Version of printer control codes (PostScript) used by the printer controller

Interface Information

This screen appears when you click the [Interface Info] sub-menu under the “Details” menu. It shows information about the printer interface.

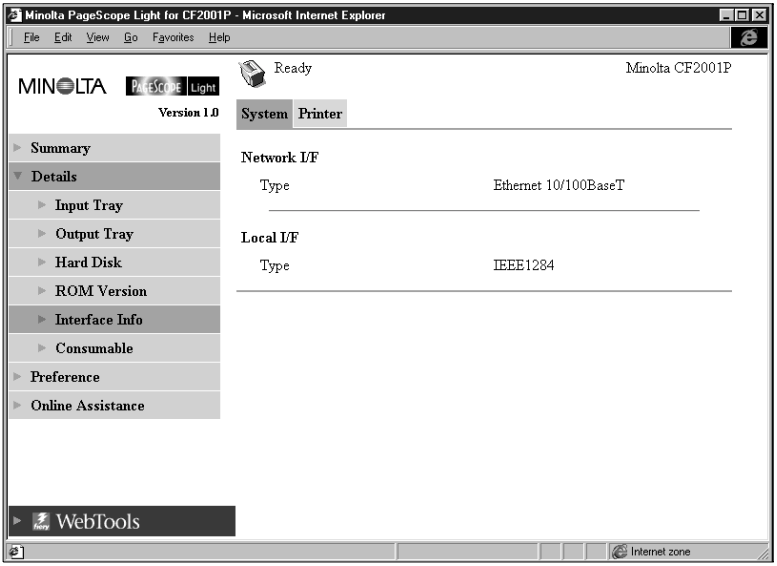

- Network I/F
  Network interface type (Ethernet 10/100BaseT or Token Ring)
- Local I/F
  Local port type

Consumable Status

This screen appears when you click the [Consumable] sub-menu under the “Details” menu. It shows the current status of CF2001P consumables. For information about consumables, see the CF2001P User Manual.

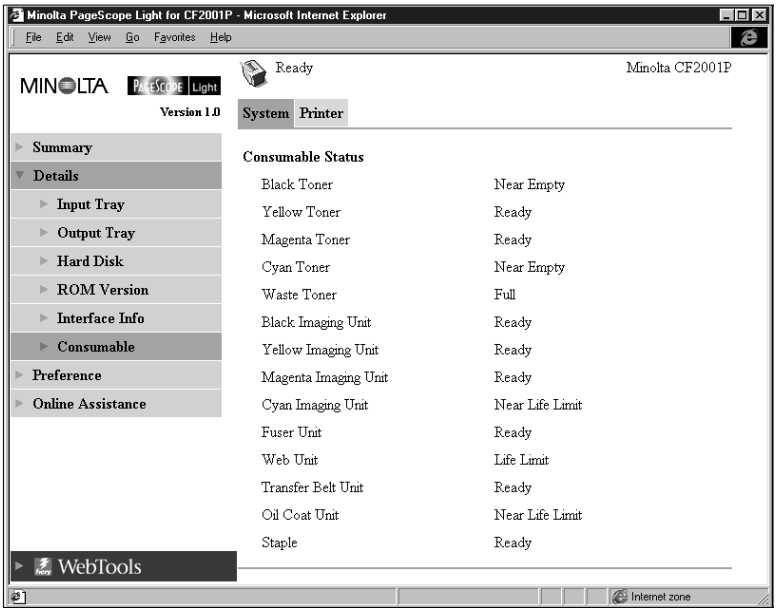

- Black Toner
  Remaining black toner
- Yellow Toner
  Remaining yellow toner
- Magenta Toner
  Remaining magenta toner
- Cyan Toner
  Remaining cyan toner
- Waste Toner
  Remaining waste toner bottle capacity
- Black Imaging Unit
  Black Imaging Unit service life status
- Yellow Imaging Unit
  Yellow Imaging Unit service life status
- Magenta Imaging Unit
  Magenta Imaging Unit service life status

- Cyan Imaging Unit
  Cyan Imaging Unit service life status
- Fuser Unit
  Fuser Unit service life status
- Web Unit
  Web Unit service life status
- Transfer Belt Unit
  Transfer Belt Unit service life status
- Oil Coat Roller Unit
  Oil Coat Roller Unit service life status
- Staple
  Remaining staples

5.3 Preference

This screen appears when you click the [Preference] menu on the “System” tab. It lets you make changes to the PageScope Light environment.

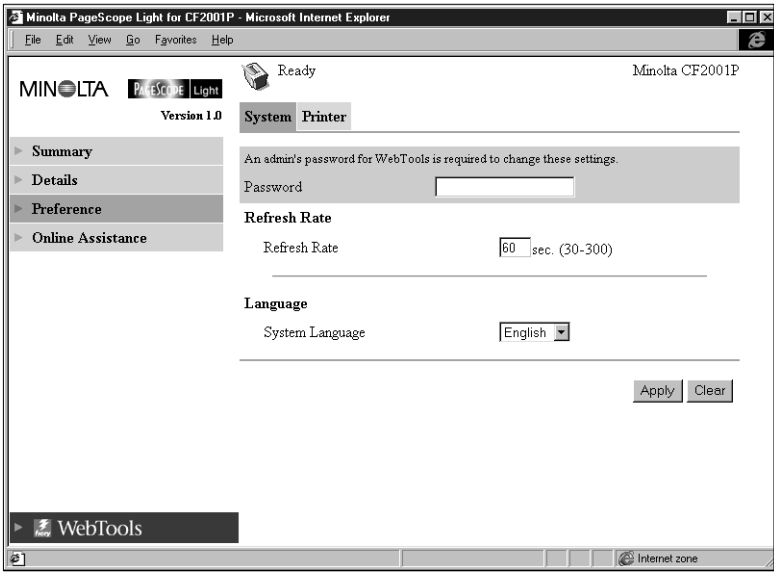

- Password
  Type in the password here when a password is defined. Note that the password is case-sensitive, so be sure to type in upper-case and lower-case characters correctly. (The password you should type in here is the same as the administrator password you created for the Fiery WebTools.)
- Refresh Rate
  Type in a value to specify the number of seconds between screen refreshes. You can input a value from 30 to 300 seconds. The default setting is 60 seconds.
- Language
  Select the screen language you want to use for PageScope Light.
  - English
  - German
  - French
  - Italian
  - Spanish

- [Apply] Button
  Click this button to apply any settings you have input or selected up to this point.
- [Clear] Button
  Click this button to cancel any settings you have input or selected up to this point.

Note
The message "Invalid Password" appears on the screen if you input the wrong password. If this happens, click your Web browser´s "Back" button to return to the previous page and configure your preferences again.

5.4 Online Assistance

This screen appears when you click the [Online Assistance] menu on the "System" tab. It shows information and lets you make settings related to product support.

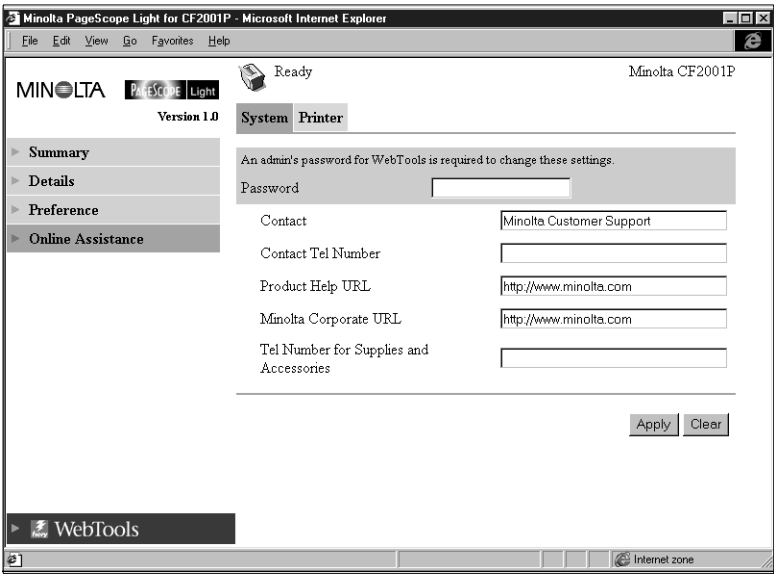

- Password
  Type in the password here when a password is defined. Note that the password is case-sensitive, so be sure to type in upper-case and lower-case characters correctly. (The password you should type in here is the same as the administrator password you created for the

Fiery WebTools.)

- Contact
  Type in the name of your product support counter.
- Contact Tel Number
  Type in the phone number of your product support counter.
- Product Help URL
  Type in the URL of your product information Website. Clicking the [Product Help URL] jumps to the Website you specify here.
- Minolta Corporate URL
  Type in the URL to the Minolta home page. Clicking the [Minolta Corporate URL] jumps to the Website you specify here.
- Tel Number for Supplies and Accessories
  Type in the telephone number of the support counter you need to contact to order consumables and accessories.
- [Apply] Button
  Click this button to apply any settings you have input up to this point.
- [Clear] Button
  Click this button to cancel any settings you have input up to this point.

Note
The message “Invalid Password” appears on the screen if you input the wrong password. If this happens, click your Web browser´s “Back” button to return to the previous page and configure your online assistance settings again.

6 Printer Tab

The “Printer” tab shows information and settings for printing on the CF2001P.

6.1 Printer Front Panel

This screen appears when you click the [Operational Panel] menu on the “Printer” tab. It provides on-screen emulation of the CF2001P operational panel.

- Display
  This area shows the printer controller message display. Messages are the same as those that appear on CF2001P operational panel.
- [Online] Button
  Toggles the printer controller network connection on line and off line

6.2 Test Print

This screen appears when you click the [Test Print] menu on the “Printer” tab. It lets you select a test print page and execute a test print operation.

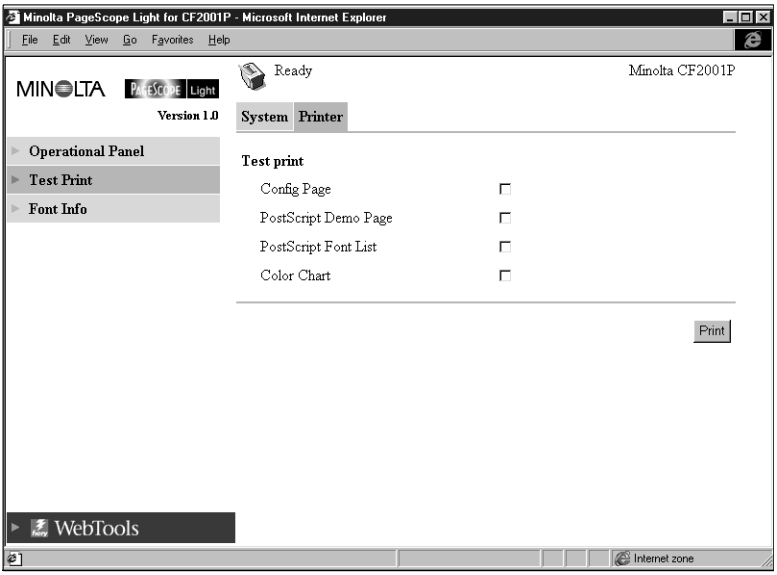

- Config Page
  Insert a check mark into the box to print the printer setup page.
- PostScript Demo Page
  Insert a check mark into the box to print the PostScript demo page.
- PostScript Font List
  Insert a check mark into the box to print the PostScript font list.
- Color Chart
  Insert a check mark into the box to print the color chart.
- [Print] Button
  Click this button to execute a test print operation.

6.3 PostScript Font

This screen appears when you click the [Font Info] menu on the “Printer” tab. It shows a list of PostScript fonts built into the printer controller. The names of fonts downloaded to the printer controller from the computer are added to the bottom of the list.

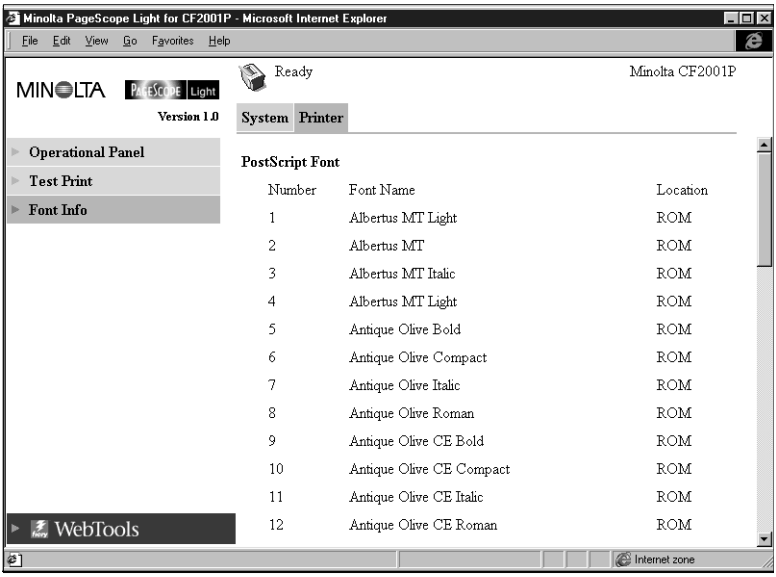
Minolta PageScope Light for CF2001P - Microsoft Internet Explorer
File Edit View Go Favorites Help
MINOLTA PageScope Light
Version 1.0
Ready
Minolta CF2001P
System Printer
Operational Panel
Test Print
Font Info
WebTools
PostScript Font
Number Font Name Location
1 Albertus MT Light ROM
2 Albertus MT ROM
3 Albertus MT Italic ROM
4 Albertus MT Light ROM
5 Antique Olive Bold ROM
6 Antique Olive Compact ROM
7 Antique Olive Italic ROM
8 Antique Olive Roman ROM
9 Antique Olive CE Bold ROM
10 Antique Olive CE Compact ROM
11 Antique Olive CE Italic ROM
12 Antique Olive CE Roman ROM
Internet zone

- Font Name
  Font name
- Location
  Storage location of the font (ROM, RAM, HDD)

7 Appendix Status List

The current CF2001P status is indicated by an icon in the upper part of the window. More detailed messages appear in the text area next to the icon. The contents of the list are arranged in order of importance (most critical first).

Icon	Status (Upper Text)	Details (Lower Text)	Description
	Fatal	Engine Malfunction	
	Error	Check Power and Cable	
		Cover Open	
		Set Up Error	Option or other component is not installed correctly
		Parts Missing	Consumable is not installed correctly
		Paper Jam	
		Paper Empty	Paper tray is empty.
		Paper Size Mismatch Error	Specified paper size is different from size of paper in paper tray.
		Paper Media Mismatch Error	Specified paper type is different from paper type being fed.
		Life of Parts	Consumable is depleted.
		Paper Capacity Over	Capacity of output tray was exceeded.

Icon	Status (Upper Text)	Details (Lower Text)	Description
	Attention	Off Line	Connection to the printer controller network is offline.
		Image Lost	Image data was lost
		Capacity Over	Waste toner bottle is full.
		Option Parts Malfunction	
		Paper Empty	Paper tray is empty
		Paper Near Empty	Tray is about to run out of paper.
		Life of Parts	Consumable is depleted
		Near Life of Parts	Consumable is nearing depletion.
		Warning	Some Problem occured when aquiring the machine status.
	Ready	Power Save	The machine is in power safe mode.
		Warming Up	
		Printing	
		Sleep Mode	
		Ready	Printer is ready